Reg. No. : E N G G T R E E . C O M

Question Paper Code: 50903

B.E./B.Tech. DEGREE EXAMINATIONS, APRIL/MAY 2024.

Fourth Semester

Computer Science and Engineering

CS 3452 - THEORY OF COMPUTATION

For More Visit our Website EnggTree.com

(Common to : Computer Science and Engineering (Artificial Intelligence and Machine Learning)/Computer Science and Engineering (Cyber Security)/ Information Technology)

(Regulations 2021)

Time: Three hours

Maximum: 100 marks

Answer ALL questions.

PART A —  $(10 \times 2 = 20 \text{ marks})$ 

- 1. How will you prove the group of statements together? Justify.
- 2. Draw the transition diagram to recognize a constant.
- 3. Write the regular expression for the language L = {Set of string with even number of 1's followed by odd number of 0's}.
- 4. Let  $\Sigma = \{0, 1\}$  and  $\Sigma' = \{a, b, c\}$  with h(0) = ab, h(1) = ac. Find homomorphic image of  $L = \{010, 0010, 1010\}$ .
- 5. Write the Chomsky hierarchy of grammar.
- 6. Mention the language accepted by empty stack and final state.
- 7. What is meant by reachable symbol?
- 8. List any four closure properties of CFL.
- 9. When do you say a problem is decidable? Give example.
- 10. What is intractable problem? Give example.

## EnggTree.com

## PART $\beta$ — (5 × 13 = 65 marks)

- 11. (a) (i) Prove that the statement "if  $n \ge 5$ , then n can be written as a sum of 2's and 3's" by inductive principle. (7)
  - (ii) Construct a DFA that accepts the string over an alphabet {0,1}, number of 0's is multiples of 3.(6)

Or

(b) (i) In Fig. 11(b), find the equivalent DFA for the following NFA. (7)




Fig. 11(b)

- (ii) Prove that the language L is accepted by NFA with ε-transition, then there exist DFA also accept the same language L.
   (6)
- 12. (a) (i) From Fig. 12(a), find the regular expression for the following DFA. (8)




Fig. 12(a)

(ii) Construct an NFA for the regular expression (01+10)\* 10\*. (5)

Or

- (b) (i) Show that the language  $L = \{0^n 1^{2n} \mid n > 0\}$  is not regular. (8)
  - (ii) Prove if L and M are regular language, then so is L-M. (5)
- 13. (a) (i) Construct a PDA that accept the language  $L = \left\{ a^m b^n c^n d^m \mid n, m \ge 1 \right\} \text{ by empty stack.} \tag{7}$ 
  - (ii) Prove that if PDA P is constructed from CFG G, then L(P) = L(G).(6)

Or

2

50903

(b) (i) Construct a CFG G which accepts the language L(M) where  $M = (\{q_0, q_1\}, \{a, b\}, \{z_0, z\}, \delta, q_0, z_0, \varphi)$  where  $\delta$  is given by (7)

$$\delta(q_0, \alpha, z_0) = (q_0, zz_0)$$

$$\delta(q_0, \alpha, z) = (q_0, zz)$$

$$\delta(q_0, b, z) = (q_1, \varepsilon)$$

$$\delta(q_1, b, z) = (q_1, \varepsilon)$$

$$\delta(q_1, \varepsilon, z) = (q_1, \varepsilon)$$

$$\delta(q_1, \varepsilon, z) = (q_1, \varepsilon)$$

- (ii) Grammar  $G: S \to S1S \mid 0$ , Is this grammar G is ambiguous? Justify. (6)
- 14. (a) (i) Convert the CFG into CNF

(8)

 $S \to AB$   $A \to aAA \mid \varepsilon$   $B \to bBB \mid \varepsilon$ 

(ii) Prove that  $L = \{a^n \mid n \text{ is perfect square}\}\$  is not context free. (5)

Or

(b) (i) Design a Turing Machine to compute  $f(m,n) = m - n, \text{ if } m \ge n \text{ 1ggTree.com}$  = 0, if m < n(8)

- (ii) Explain the programming techniques for Turing Machine. (5)
- 15. (a) (i) Let  $\Sigma = \{0, 1\}$ , Let A and B be the list of string defined as

rc	List A	List B
i	$w_{i}$	$x_i$
1	1	10
2	110	0
3	0	11

Find the instance of MPCP.

(7)

(ii) Show that 3-CNF SAT is NP complete.

(6)

Or

- (b) Find the following languages are recursively enumerable.
  - (i) Union of recursively enumerable languages.

(7)


L and complement of L are recursively enumerable.

(6)

3 **50903** 

PART C 
$$\rightarrow$$
 (1 × 15 = 15 marks)

16. (a) Construct a minimal state DFA and find the regular expression for the DFA. (15)

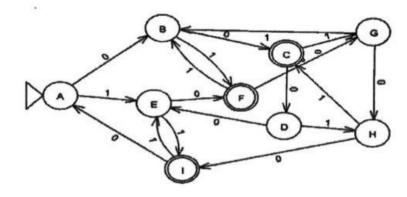

Or

(b) Construct a Turing Machine to implement the multiplication operation  $f(m,n) = m^*n$ , where m and n are positive numbers and simulate their action as input  $5^*4$ . (15)

www.EnggTree.com

EnggTree.com